

Pin-Belegung / Pin Assignment

P1	P2
(B4,B9,A4,A9) VBus	VBus
(B5) Vconn	Vconn
(A5) CC	CC
(A7) D-	D-
(A6) D+	D+
(A1,A12,B1,B12) GND	GND
Shell	Shell

Sync & Charge USB-C™-Kabel, USB 2.0


- leistungsstarkes Aufladen mit bis zu 240 W bei 5 A und 48 V
- universell kompatibel mit allen USB-C™-Geräten, z. B. Ladegeräte, Powerbanks, externe Festplatten und Autoladegeräte
- mit symmetrischen, verdrehsicheren Steckern

Anschlüsse:	2x USB-C™-Stecker
Material Kabelmantel:	PVC 45P
Max. Datenübertragungsrate:	480 MBit/s
Kabelaufbau:	[30 AWG (7/0.10TC) + A] * 1P + 23 AWG (35/0.10TC + 250D Nylon)+ AM] * 2P + 30 AWG (7/0.10TC) * 2C + 4E (19/0.10TC) AB (16/9/0.06TC 70%)
Außendurchmesser Kabel:	4,0 mm
Kontaktwiderstand:	3 Ω max.
Isolationswiderstand:	300 V ===/10 ms; 10 MΩ min.

Sync & Charge USB-C™ Cable, USB 2.0

- powerful charging with up to 240 W at 5 A and 48 V
- universally compatible with all USB-C™ devices, e.g. chargers, power banks, external hard drives and car chargers
- with symmetric, confusion-free connectors

Connectors:	2x USB-C™ plug
Material cable jacket:	PVC
Max. data transmission rate:	480 MBit/s
Cable structure:	[30 AWG (7/0.10TC) + A] * 1P + 23 AWG (35/0.10TC + 250D Nylon)+ AM] * 2P + 30 AWG (7/0.10TC) * 2C + 4E (19/0.10TC) AB (16/9/0.06TC 70%)
Outer diameter cable:	4.0 mm
Contact resistance:	3 Ω max.
Insulation resistance:	300 V ===/10 ms; 10 MΩ min.

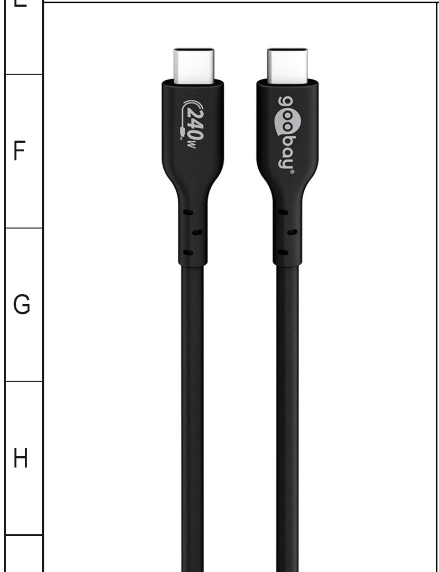

Änderungen			Datum	Name	Bezeichnung	Blatt
Datum	Name	gez.:	13.02.2023	aw	USB 2.0 240W 480Mbps C/C 0100 SCHWARZ	1/1
		gepr.:	13.02.2023	aw		
		Norm:			Zeichnungs-Nr.:	von
Änderungen vorbehalten / Subject to change					61717	

